


Suction Line Accumulator 气液分离器



FEATURES:

- * U-tube design for maximum flow of refrigerant and minimum oil return
- * U-tube entrance is positioned behind the inlet flow deflector to prevent unwanted liquid refrigerant from entering and damaging compressor
- * Max. working pressure 30 bar; compatible with CFC, HCFC and HFC refrigerants
- * Corrosion resistant epoxy powder coating
- * U 型弯管设计保证最大制冷剂流量的同时，最小的回油量
- * 进液管导向与U型弯错开，防止液态制冷剂直接进入压缩机
- * 最大工作压力为 30 bar；适用于 CFC, HCFC 和 HFC 制冷剂
- * 表面涂层采用抗腐蚀的环氧粉末喷涂

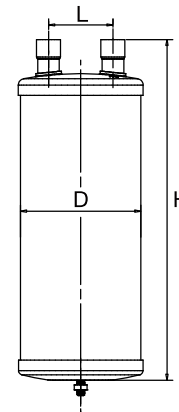

Model	Connection ODF	Nominal Capacity (kW) at evaporating temperature								Volume	Dimension mm		
		R22		R134a		R404A		R410A			D	L	H
		-18°C	+5°C	-18°C	+5°C	-18°C	+5°C	-18°C	+5°C				
FDQ-204	1/2"	3.2	7.0	2.2	4.3	2.8	4.6	4.9	10.6	1.5 L	102	52	233
FDQ-205	5/8"	4.9	10.5	2.8	6.0	4.2	7.0	7.4	16.0	1.8 L	102	52	283
FDQ-206	3/4"	6.3	14.1	3.2	8.1	5.3	9.2	9.6	21.4	3.5 L	140	80	288
FDQ-207	7/8"	11.6	25.7	6.3	14.0	9.5	16.2	17.6	39.1	4.4 L	140	80	353
FDQ-208	1-1/8"	18.9	41.5	10.9	25.3	15.5	26.7	28.7	63.1	7.2 L	159	85	438
FDQ-209	1-3/8"	29.9	66.1	16.2	37.6	25.3	42.9	45.4	100.5	8.9 L	159	85	535
FDQ-210	1-5/8"	45.0	101.3	25.7	59.8	37.6	64.0	68.4	154.0	9.9 L	159	85	592
FDQ-596	3/4"	6.3	14.1	3.2	8.1	5.3	9.2	9.6	21.4	2.6 L	127	70	265
FDQ-597	7/8"	11.6	25.7	6.3	14.0	9.5	16.2	17.6	39.1	2.6 L	127	70	270
FDQ-5126	3/4"	6.3	14.1	3.2	8.1	5.3	9.2	9.6	21.4	3.3 L	127	70	325
FDQ-5127	7/8"	11.6	25.7	6.3	14.0	9.5	16.2	17.6	39.1	3.5 L	127	70	340
FDQ-5137	7/8"	11.6	25.7	6.3	14.0	9.5	16.2	17.6	39.1	4.0 L	127	70	390
FDQ-5139	1-1/8"	18.9	41.5	10.9	25.3	15.5	26.7	28.7	63.1	4.0 L	127	70	395
FDQ-5179	1-1/8"	18.9	41.5	10.9	25.3	15.5	26.7	28.7	63.1	5.0 L	127	70	475
FDQ-51711	1-3/8"	29.9	66.1	16.2	37.6	25.3	42.9	45.4	100.5	5.0 L	127	70	477
FDQ-61411	1-3/8"	45.0	101.3	25.7	59.8	37.6	64.0	45.4	100.5	6.5 L	159	85	410
FDQ-62013	1-5/8"	45.0	101.3	25.7	59.8	37.6	64.0	68.4	153.5	9.5 L	159	85	572