


FDA / FDB series Replaceable Filter Drier Shell

FDA / FDB 系列可换芯干燥过滤筒



FEATURES:

- * Match all 48 and 100 series filter drier cores and suction line cores
- * Max. working pressure 45 bar; compatible with CFC, HCFC and HFC refrigerants
- * 1/4 NPT access port; corrosion resistant epoxy powder coating
- * 可适配所有 48 和 100 系列滤芯
- * 最大工作压力为 45 bar; 适用于 CFC, HCFC 和 HFC 制冷剂
- * 配备 1/4" 检修口; 表面涂层采用抗腐蚀的环氧粉末喷涂

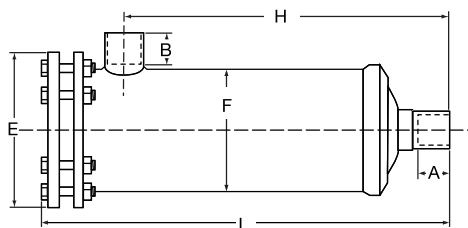

Model	Connection ODF	Nominal Flow Capacity (kW) at 0.014 Mpa pressure drop					Core Q'ty	Dimension (mm)					
		R12	R134a	R22	R404A	R502		A	B	H	L	E	F
FDA-485	5/8"	52.8	66.9	73.8	49.0	45.8	1	31	31	147	230	122	153
FDA-487	7/8"	97.6	123.2	132.8	88.6	84.8		35	35	152	235		
FDA-489	1-1/8"	140.2	168.6	187.0	124.2	120.0		38	38	154	237		
FDA-4811	1-3/8"	160.2	196.8	214.6	140.2	138.2		38	38	154	237		
FDA-4813	1-5/8"	224.2	274.6	298.0	198.2	194.6		38	38	153	236		
FDA-4817	2-1/8"	253.3	310.2	332.2	235.2	211.2		44	45	158	241		
FDA-967	7/8"	109.4	130.4	144.2	96.8	91.2		2	35	35	296		
FDA-969	1-1/8"	165.4	205.6	221.8	148.6	138.6	38		38	298	381		
FDA-9611	1-3/8"	207.6	252.4	278.0	183.0	178.4	38		38	298	381		
FDA-9613	1-5/8"	225.3	276.4	299.2	197.6	192.5	38		38	297	380		
FDA-9617	2-1/8"	257.0	330.8	337.6	288.5	267.4	44		45	302	385		
FDA-1449	1-1/8"	197.6	232.8	249.0	281.6	172.5	3		38	38	441	525	
FDA-14411	1-3/8"	267.5	320.5	344.2	239.4	235.4			38	38	440	524	
FDA-14413	1-5/8"	292.2	348.5	373.6	260.5	257.0		38	38	440	524		
FDA-14417	2-1/8"	330.8	397.3	429.4	295.7	288.6		44	45	444	528		
FDA-19211	1-3/8"	285.4	336.8	366.0	253.2	248.6		4	38	38	590	674	
FDA-19213	1-5/8"	306.2	369.2	397.6	274.5	267.4			38	38	590	674	
FDA-19217	2-1/8"	341.4	408.8	438.2	308.6	296.4			44	45	594	678	
FDB-10017	2-1/8"	205.0	206.0	294.0	260.0	172.0	1		40	40	189	310	
FDB-10021	2-5/8"	221.0	225.0	302.0	287.0	191.0			54	50	201	322	
FDB-10024	3"	237.0	238.0	325.0	316.0	204.0			56	50	196	322	
FDB-10025	3-1/8"	242.0	249.0	342.0	339.0	230.0			56	50	195	321	
FDB-20017	2-1/8"	265.0	273.0	382.0	390.0	280.0		2	40	40	349	470	
FDB-20021	2-5/8"	282.0	297.0	408.0	308.0	312.0			54	50	361	482	
FDB-20024	3"	305.0	319.0	431.0	321.0	340.0			56	50	356	482	
FDB-20025	3-1/8"	331.0	327.0	453.0	336.0	367.0	56		50	355	481		
FDB-20028	3-1/2"	371.0	341.0	476.0	359.0	381.0	60		50	357	483		
FDB-20029	3-5/8"	398.0	364.0	498.0	378.0	305.0	60		50	356	482		
FDB-20034	4-1/4"	422.0	382.0	521.0	391.0	323.0	57		50	338	474		
FDB-30017	2-1/8"	447.0	534.0	579.0	433.0	370.0	3	40	40	509	630		
FDB-30021	2-5/8"	473.0	556.0	602.0	457.0	389.0		54	50	521	642		
FDB-30024	3"	482.0	572.0	617.0	462.0	396.0		56	50	516	642		
FDB-30025	3-1/8"	492.0	589.0	635.0	480.0	405.0		56	50	515	641		
FDB-30028	3-1/2"	501.0	600.0	654.0	486.0	407.0		60	50	517	643		
FDB-30029	3-5/8"	510.0	610.0	672.0	492.0	410.0		60	50	516	642		
FDB-30034	4-1/4"	523.0	632.0	694.0	511.0	427.0		57	50	498	634		
FDB-40017	2-1/8"	545.0	654.0	703.0	528.0	457.0	4	40	40	669	790		
FDB-40021	2-5/8"	573.0	694.0	729.0	549.0	478.0		54	50	681	802		
FDB-40024	3"	608.0	734.0	754.0	570.0	499.0		56	50	676	802		
FDB-40025	3-1/8"	631.0	754.0	776.0	691.0	520.0		56	50	675	801		
FDB-40028	3-1/2"	659.0	776.0	795.0	623.0	547.0		60	50	677	803		
FDB-40029	3-5/8"	673.0	792.0	816.0	649.0	574.0		60	50	676	802		
FDB-40034	4-1/4"	698.0	803.0	832.0	673.0	598.0		57	50	658	794		
FDB-40042	5-1/4"	720.0	831.0	857.0	699.0	327.0	57	50	635	784			